

TUC-24-HC

 Undercounter Foodservice Refrigerator, 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	610	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	627	Door Opening	Right (standard) or Left. Field Reversible.	Refrigerant	R290
External Height (mm)	802	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1
Net Volume (Litres)	94	Air Intake Position	Front	Wattage	230
Gross Volume (Litres)	158	Ventilation Position	Front	Climate Class	5
Supplied Shelves	2	Clearance Required	Zero back and sides	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Shelf Size (L x D mm)	One 508 x 352 + One 508 x 273	Cord Length (Meters)	2.13	Testing Standard	EN 16825
Internal Net Height (mm)	600	Standard w/ Locks	Standard	EEC	A
Unpackaged Weight (kg)	60			EEL	19.5
Packaged Weight (kg)	71			kWh/24hr	1.08
Packaged Dimensions (W x D x H mm)	788 x 762 x 1042			kWh/Annum	395
Supplied with	Built-in recessed castors (7mm clearance)			Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland

0800 783 2049

EMEA

+41 61 563 07 05

Australia

+61 2 9619 9999

TFIUK@truemfg.com


TrueCHCustomerService@truemfg.com

TrueRefAus@truemfg.com



TUC-24-HC

 Undercounter Foodservice Refrigerator, 1 Solid Swing Door

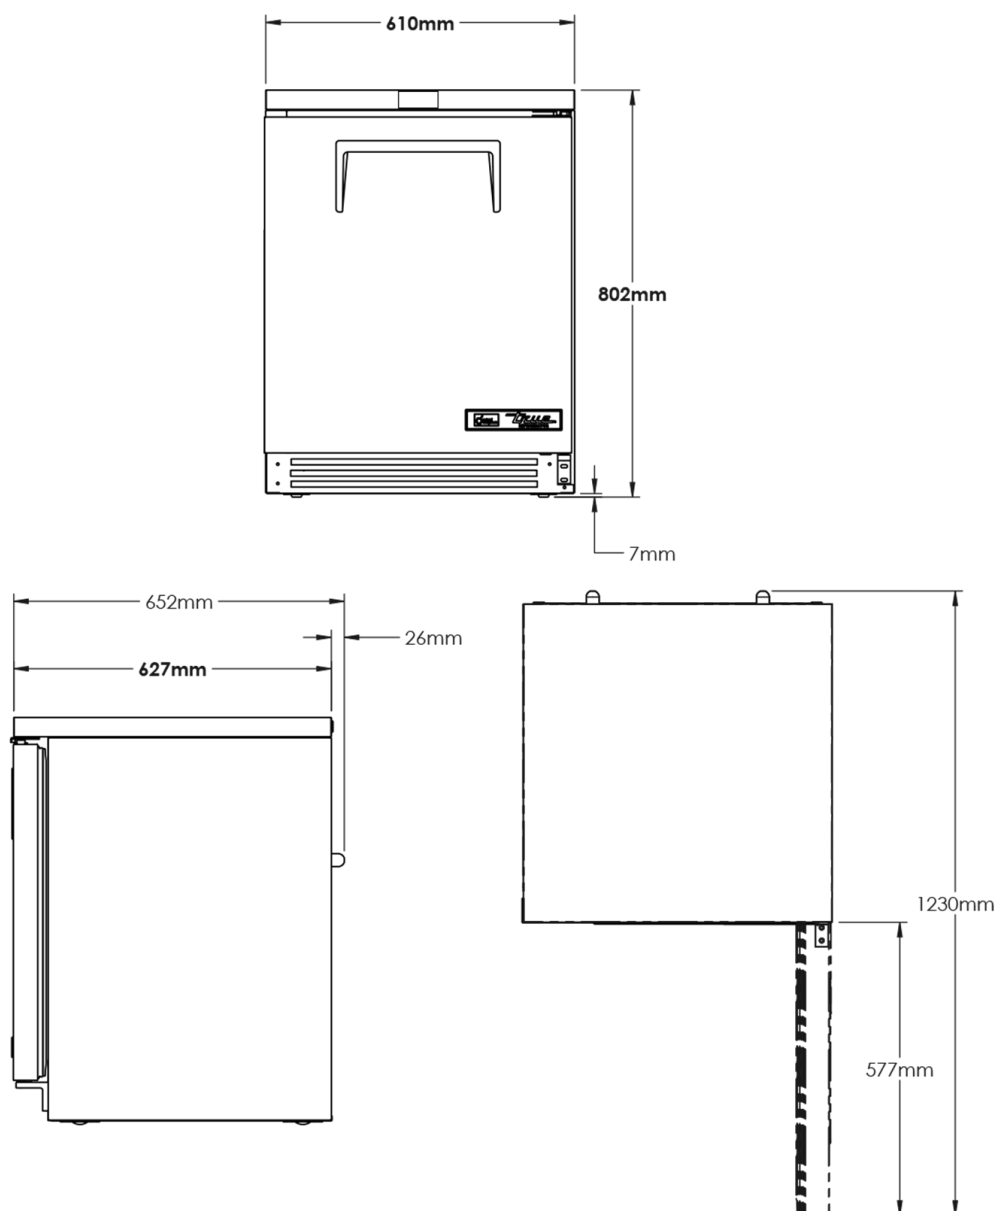

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

